


Maxporter C series chain conveyors are durable, long-lasting and of high quality. It is compatible for conveying grain at high capacity and low energy. It has CE certificate.

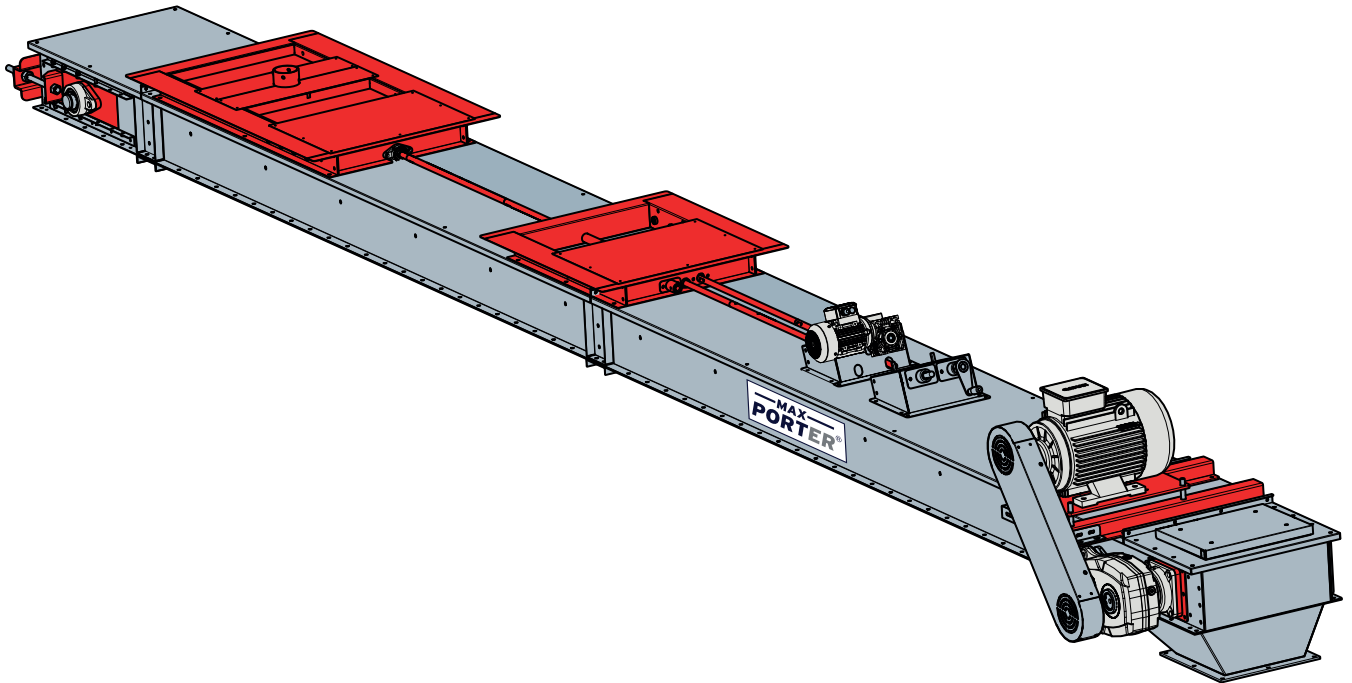

## PRODUCT FEATURES

The body of our C Series chain conveyors is made of galvanized sheet. Has a modular structure with bolt and nut connections. It is preferred at the unloading process of flat bottom silo. For different capacities and models, we are using chains operating at different loads. The base and side surfaces can optionally be reinforced with polyethylene sheets or non-wear steel plates.


C Series HI model chain conveyors designed to convey the product as inclined at angles of 5°, 10° and 15°.

### STANDARD EQUIPMENTS:

- K Model Drive
- Belt Pulley Casing
- Discharge Chamber
- Silo Unloading Mechanism Kit


### OPTIONAL EQUIPMENTS:

- A Model Drive
- RPM Sensor
- Polyethylene Coating at Base and Side
- Non-Wear Steel Plate at Base and Side

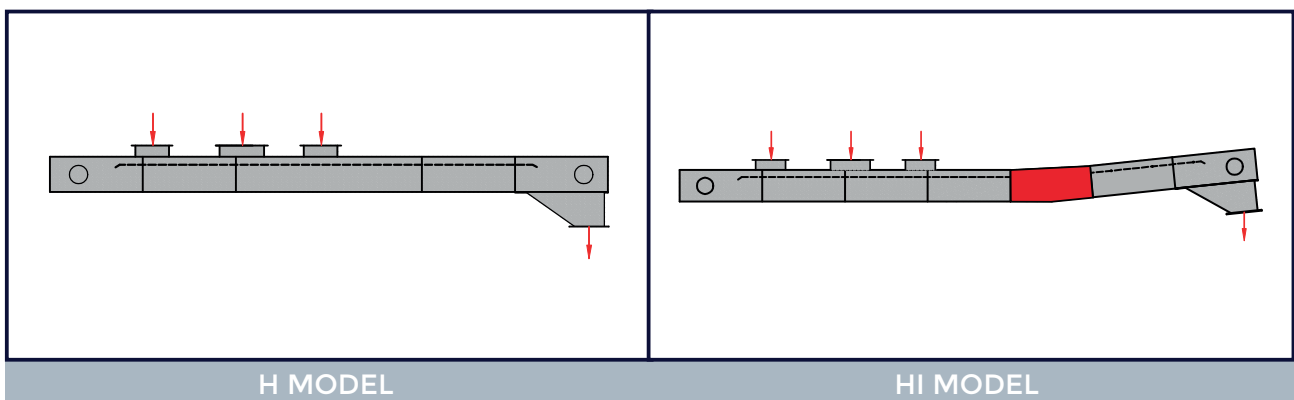

H MODEL

HI MODEL

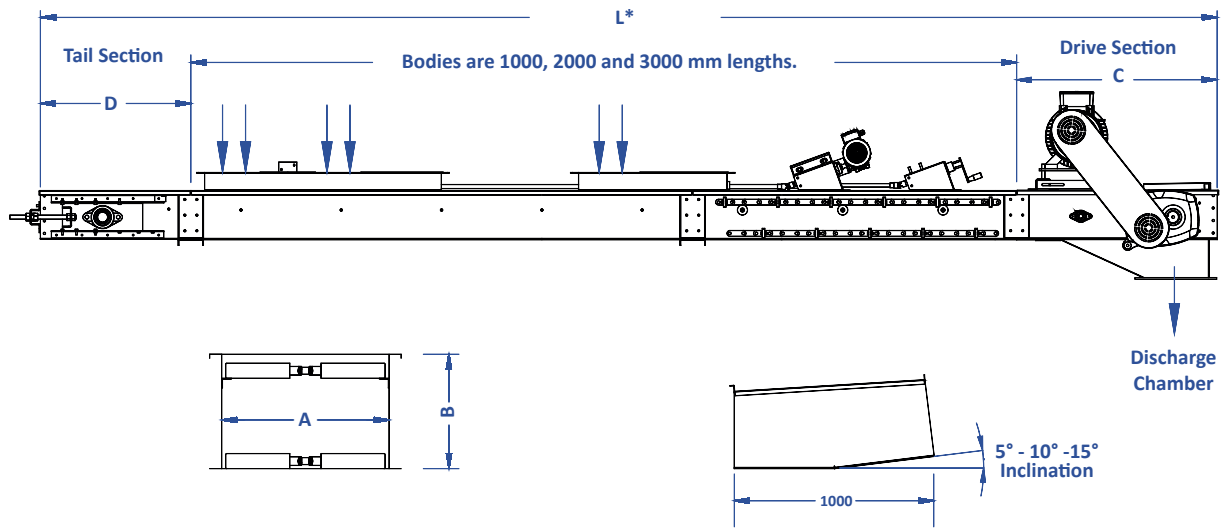

## Capacity Chart

		2024	2624	5224	5224	3643
AxB	mm	200x240	260x240	520x240	520x240	360x430
C	mm	1.000				
D	mm	750				
Capacity	t/h	25	50	100	150	200
Capacity	m <sup>3</sup> /h	35	70	140	200	265
Rpm	rpm	60	84	70	100	42
Chain Speed	m/sec	0,45	0,65	0,6	0,75	0,75
Chain Type		81X-81XH				
Chain Link	mm	66,27				
Chain WLL	kN	107-152				
Intermediate Bodies Side and Base Sheet Thickness	mm	2,5/2,5	2,5/3			

- \* Dimensions are given as mm.
- \* Our capacity unit is calculated as m<sup>3</sup>/h.
- \* The data in the chart are approximate values.
- \* Product density has been calculated as 769 kg/m<sup>3</sup> for ton calculation.
- \* Maxporter has the right to change technical specifications.
- \* L Length may vary depending on the requirement.