


Mxflow E series dryers represent a new era in drying technology on account of their unique design and flexible structure. Owing to its multi-burner structure, drying is provided in the most suitable environment for grains. By closing the desired floor and putting it into use, the grain can be rested even in the process and all the tension that may occur on it can be eliminated. This ensures that the product dries with the least damage.

PRODUCT FEATURES

It applies the mixed drying method, which is the most efficient drying method, by drying with the air flow perpendicular to the flow direction of the grain. It has a structure suitable for continuous drying. It provides drying opportunity even if the product to be dried does not fill the entire machine.

Due to the high air velocity, large capacities are obtained in small volumes. Using forward curved silent centrifugal fans, high flow low cost airflow is achieved. Because of the triangular channels, the product is distributed evenly in the machine. The grain columns extend along the length of the machine to provide drying in maximum area and volume. The equipment used is of high quality and long-lasting. The burner computer keeps the continuity of the combustion under control by constantly checking the air flow, temperature and the presence of the flame. The desired section can be set as full heating or full cooling. This structure constitutes the top model of the market in terms of flexibility. Many different types of products can be dried in the same dryer.

Due to its design feature, the number of floors and capacity can be increased in the future.

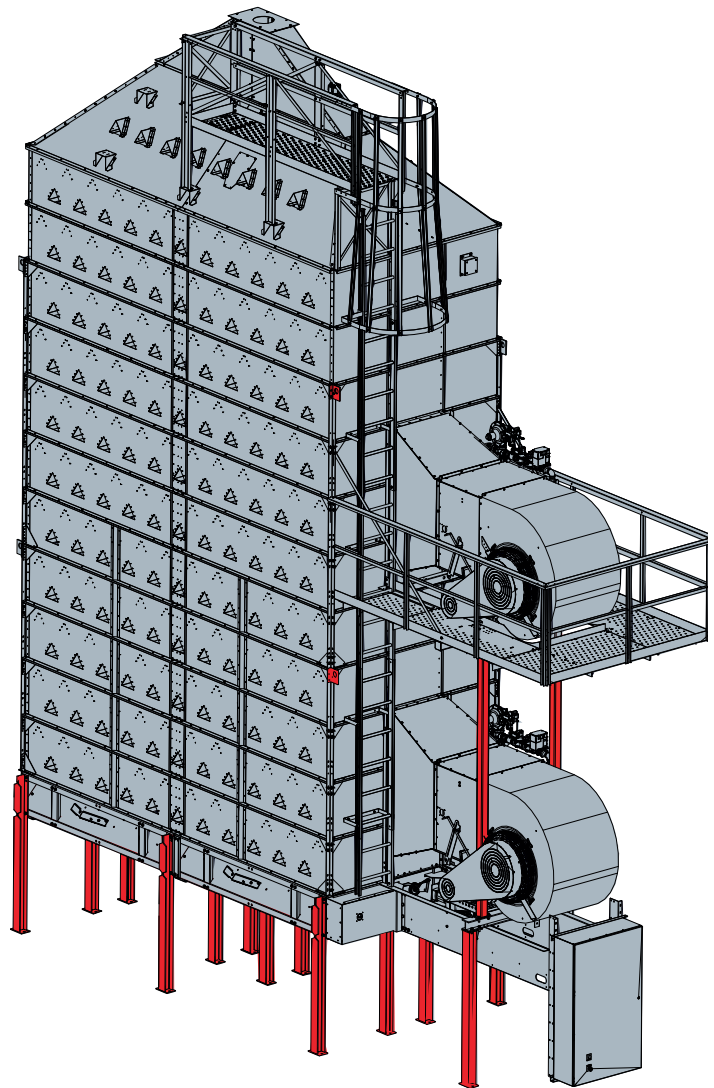


STANDARD EQUIPMENTS:


- Unloading System Drive Mechanism
- Forward Curved Fans
- Hot Air Distribution Section
- Dryer Loading Chamber Inlet
- Grain Holding and Distribution Section
- Grain Drying Columns
- PLC Control Panel
- Access Stairs and Platforms

OPTIONAL EQUIPMENTS:


- Motor Upgrade Option
- Chain Conveyor Unloading System
- Husk Collection System
- Upper Level Auge




Grain Columns



Forward Curved Fan



Product Discharge
Dosed Discharge

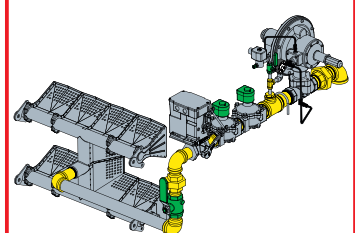

Combustion
/ Combustor System

Capacity Chart

MODELS		FEATURES														
		Amount of Floors	Column Length (m)	Loading Capacity (m³)	Loading Capacity (MT)	Corn Drying %5 (22-17%) Heating 99C°	Corn Drying %10 (27-17%) Heating 99C°	Corn Drying %5 (20-15%) Heating & Cooling 99C°	Corn Drying %10 (25-15%) Heating & Cooling 99C°	Total Aeration Amount (m³/min)	Total Power of Fans (kW)	Discharge Motor Power (kW)	Level Auger Height (m)	Self Loading Height (m)	Total Length	Width
MX-E3617		4	3,6	17	10,8	10	5	6	3	410	11,2	1,1	4,63	4,88	6,10	2,35
MX-E3618		5		18	12,6	11,5	6	8	4	470	11,2		5,24	5,49		
MX-E3620		6		20	14,5	13,5	7	11,00	5	550	11,2		5,85	6,10		
MX-E4824		5	4,8	24	17	15	8	11,3	5,5	650	14,9	5,5	5,24	5,87	7,32	
MX-E4827		6		27	19,5	18	9	14	7,5	750	14,9		5,85	6,48		
MX-E4830		7		30	21,8	21	11	17	9	900	18,7		6,46	7,09		
MX-E4834		8		34	24,25	24	13	21	11	1.000	22,4		7,07	7,70		
MX-E4841		10		41	29,15	31	16	28	15	1.300	29,9		8,29	8,92	8,23	
MX-E4847		12		47	34,21	35	19	32	17	1.550	29,9		9,51	10,13		
MX-E4854		14		54	39	42,3	23	38	20	1.850	41,1		10,73	11,35		
MX-E4861		16		61	44	48	26	45	24	2.200	48,5		11,95	12,56		
MX-E4868		18	68	48,75	55	29	50	27	2.330	56,0	13,17	13,78	10,67			
MX-E7341		6	7,3	41	29,25	27	14	21	11	1.160	22,4	7,5		5,85	7,29	
MX-E7351		8		51	36,5	36	19	31	16	1.550	29,9			7,07	8,51	
MX-E7361		10		61	43,75	41,5	22	38	20	1.750	37,3			8,29	9,73	
MX-E7372		12		72	51,25	54	29	47	24,5	2.300	44,8			9,51	10,95	
MX-E7381		14		81	58,5	58	32	54	28	2.534	52,3			10,73	12,17	
MX-E7391		16		91	66	71	39	67	35	3.110	59,7			11,95	13,39	
MX-E73112		20		112	80,5	90	49	85	45	3.850	74,7			14,39	15,82	
MX-E73132		24		132	95	105	58	104	56	4.650	89,6		16,82	18,26	13,11	
MX-E9895		12	9,8	95	68	70	38	62	32	3.000	67,2	11	9,51	11,77		
MX-E98112		16		112	87,5	95	51	88	46	4.050	89,6		11,95	14,20		
MX-E98149		20		149	107	116	64	112	60	5.130	104,5		14,39	16,64		
MX-E98179		24		179	127	142	77	136	73	6.100	134,4		16,82	19,08		

* Capacities are calculated according to (769kg/m³) product density.

* All values given are predictions obtained by MYSİLO from the combination of field experiences and computer analysis. Field results may vary according to conditions of; temperature and humidity, grain inlet temperature, grain (seed) maturity and variety, grain cleanliness, test weight, drying operating temperature, drying and cooling zones and number etc.

* MXFLOW Dryers have 3 different fuel type options as LNG, LPG and DIESEL.

* MYSİLO reserves the right to change the technical specifications.