


UP model sweep auger convey the grain, which cannot be emptied with free flow in the silo, to the center by means of chain connected pallets just like the chain conveyor does. It has CE certificates

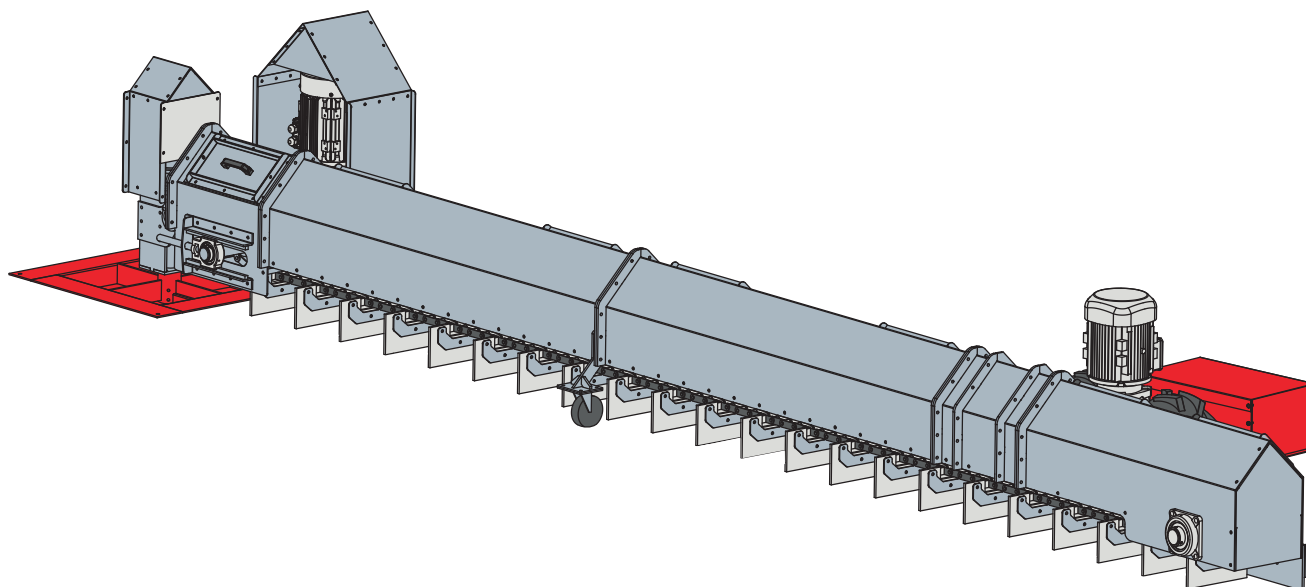

PRODUCT FEATURES


The movement mechanism of our Maxporter UP model sweep augers is T model drive. Two T drives are used in silos of 22 models and above. It has a coupled motor that drives the pallets. The pallets are made of rubber, and the unloading is carried out safely. Since the pallets are in contact with the floor, there is no grain left on the floor.

STANDARD EQUIPMENTS:


- Motor Section Unit
- Shields
- Chain and Pallet System
- T Model Drive
- Control Panel

OPTIONAL EQUIPMENTS:


- Control Panel with Inverter
- Clogging Sensor
- Parking Sensor




Motor Section




Palette



T Model Drive



Control Panel

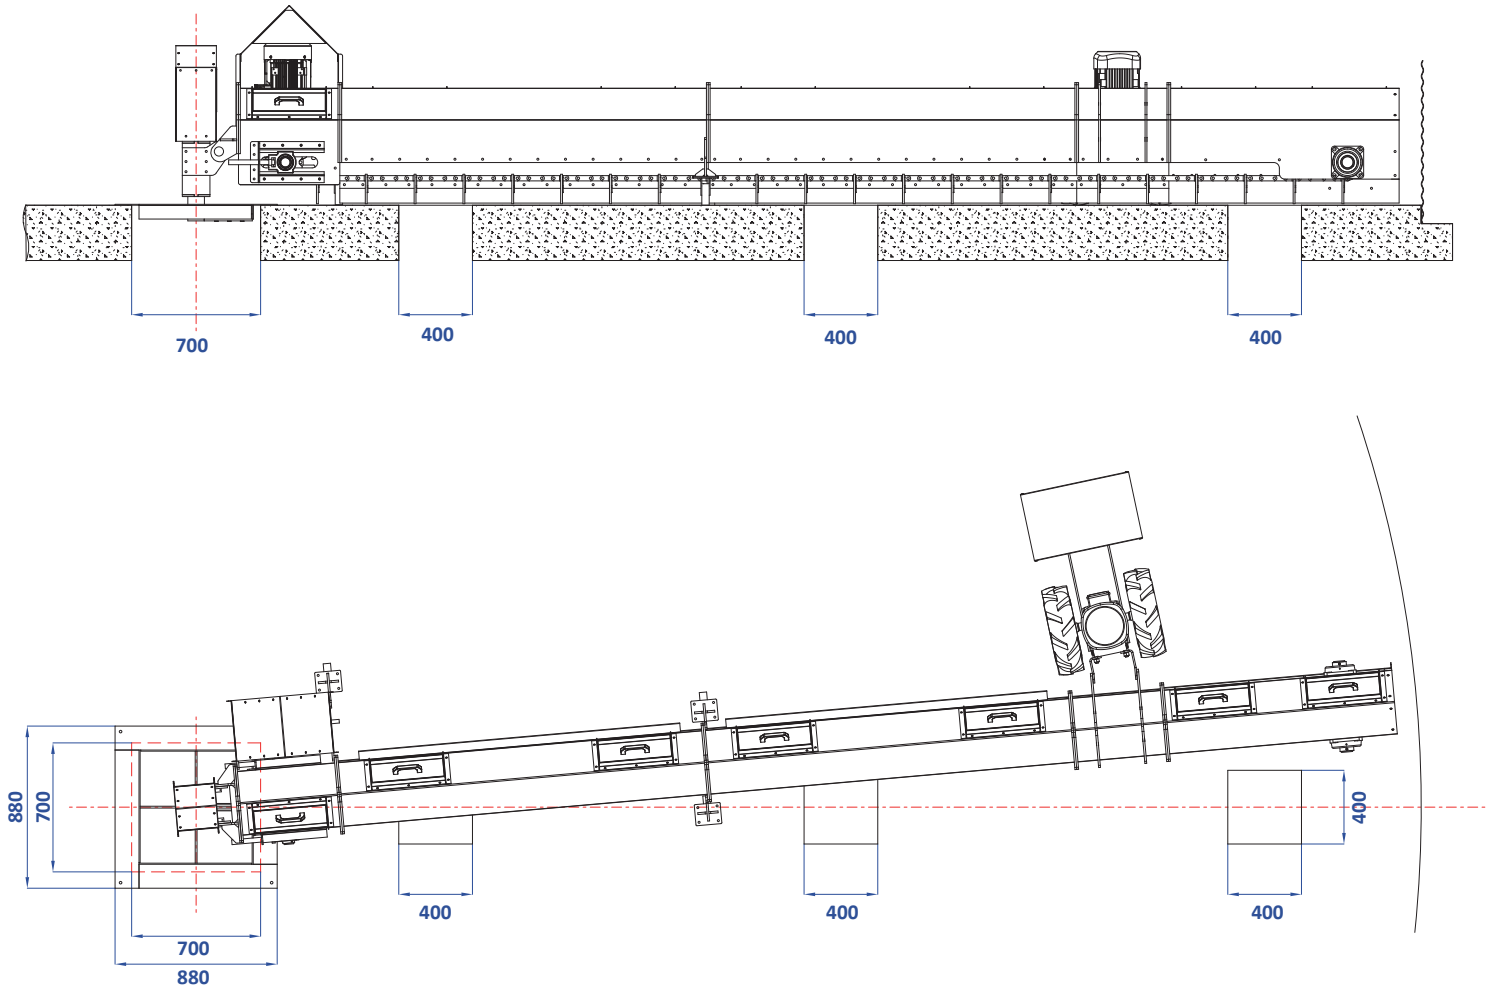

Capacity Chart

Model	Capacity	
	t/h	m³/h
SA-UP3040	50	67
SA-UP3080	100	133
SA-UP3097	125	167
SA-UP3130	150	200
SA-UP4100	200	267
SA-UP4118	250	333
SA-UP4140	300	400

- Density was considered according to wheat 0,75 t /m³.
- Capacity values are maximum values.
- Mysilo has the right to change technical specifications

SPO.KTLG.14/00/21.12.2022-E