


The unloading auger is used for the unloading of the grain inside the silo. The grain is discharged from the silo with the help of central and intermediate gates. The components that make up the unloading auger are essentially the manually controlled central gate and intermediate gates; an auger flight and a sliding mechanism that can be easily controlled from the outside of the silo.

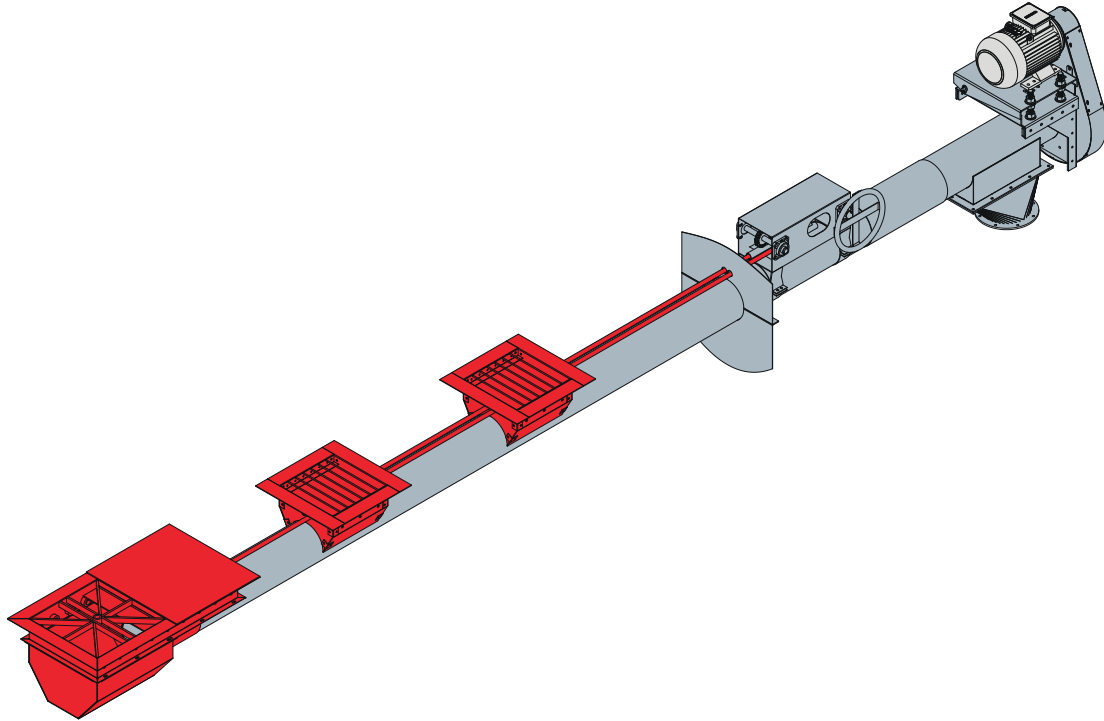



PRODUCT FEATURES

The body of the unloading auger is manufactured from painted st37 black steel sheet. It has a modular structure with bolt and nut connections. It is preferred for flat-bottomed silo unloading. Different pipe and flight diameters are used depending on the capacity and model.

STANDARD EQUIPMENTS:

- Driving Head Unit
- Belt Pulley Casing
- Discharge Chamber
- Silo Unloading Mechanism Kit

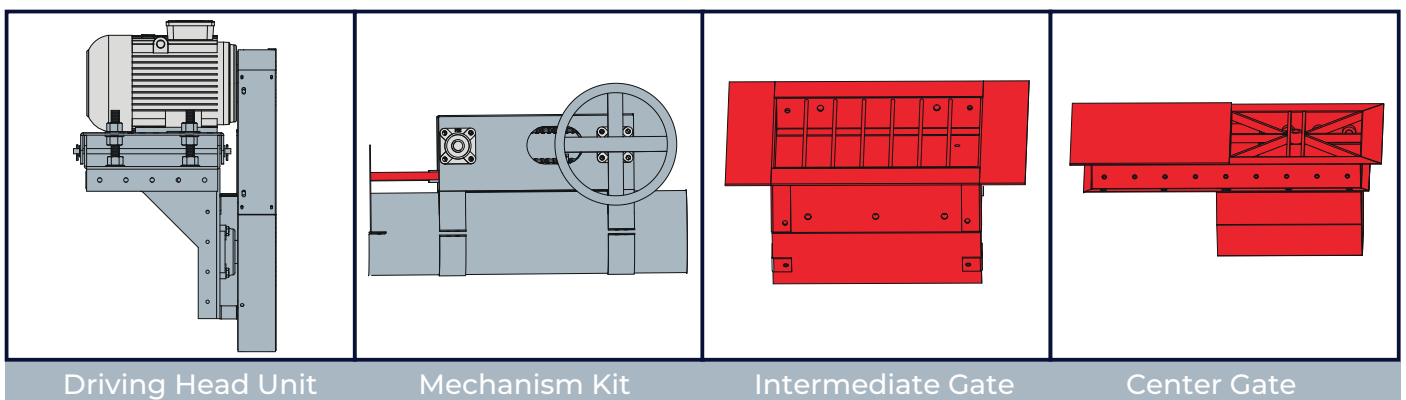

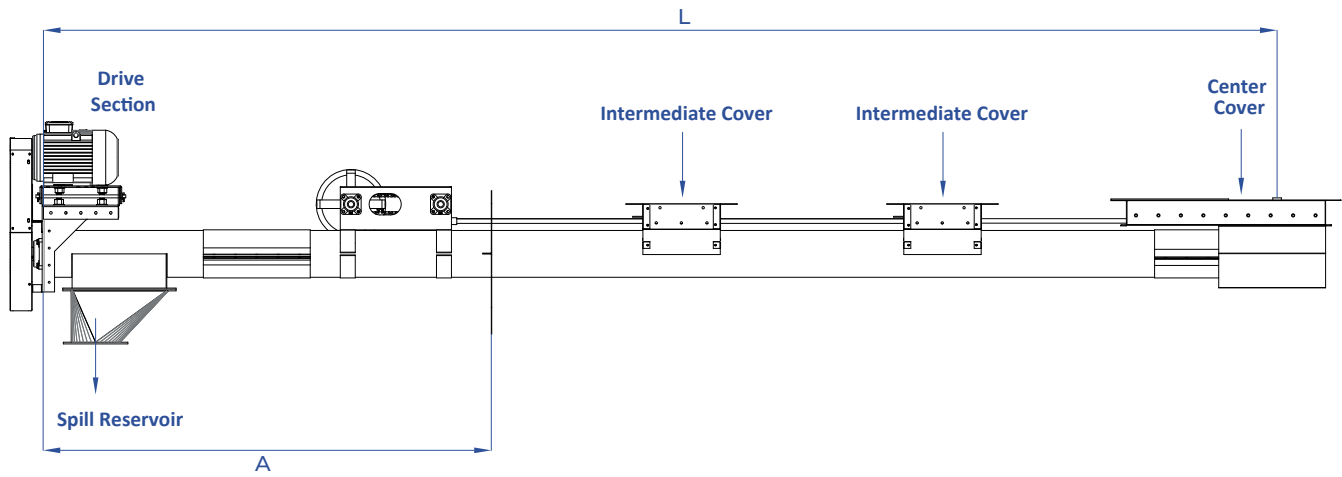

Technical Specifications

Model	Silo Diameter (m)	Capacity m3/h	Flight RPM	Motor Power (kW)	Intermediate Gate Amn.	L	A
A-B21904	3,66	65	360	1,5	1	3.800	2.300
A-B21905	4,58	65	360	2,2	1	4.300	2.300
A-B21906	5,50	65	360	2,2	1	4.800	2.300
A-B21907	6,41	65	360	4,0	1	5.200	2.300
A-B21908	7,33	65	360	4,0	2	5.700	2.300
A-B21909	8,25	65	360	5,5	2	6.100	2.300
A-B21910	9,16	65	360	5,5	2	6.600	2.300
A-B21911	10,08	65	360	5,5	3	7.100	2.300
A-B21912	11,00	65	360	5,5	3	7.500	2.300
A-B21913	11,91	65	360	5,5	3	8.000	2.300
A-B21914	12,83	65	360	5,5	4	8.400	2.300
A-B21915	13,75	65	360	5,5	4	8.900	2.300
A-B21916	14,66	65	360	5,5	4	9.400	2.300
A-B21917	15,58	65	360	5,5	4	9.800	2.300
A-B21918	16,49	65	360	5,5	4	10.300	2.300
A-B21919	17,41	65	360	5,5	4	10.700	2.300
A-B21920	18,33	65	360	5,5	4	11.200	2.300
A-B27308	7,33	130	360	5,5	2	5.700	2.300
A-B27309	8,25	130	360	5,5	2	6.100	2.300
A-B27310	9,16	130	360	5,5	2	6.600	2.300
A-B27311	10,08	130	360	7,5	3	7.100	2.300
A-B27312	11,00	130	360	7,5	3	7.500	2.300
A-B27313	11,91	130	360	7,5	3	8.000	2.300
A-B27314	12,83	130	360	7,5	4	8.400	2.300
A-B27315	13,75	130	360	7,5	4	8.900	2.300
A-B27316	14,66	130	360	7,5	4	9.400	2.300
A-B27317	15,58	130	360	7,5	4	9.800	2.300
A-B27318	16,49	130	360	11,0	4	10.300	2.300
A-B27319	17,41	130	360	11,0	4	10.700	2.300
A-B27320	18,33	130	360	11,0	4	11.200	2.300

-Dimensions are given in mm.

- The data in the tables are approximate.

- Maxporter reserves the right to change technical specifications.